

VIDORA

WOODEN SERIES

Newbee
纽密 | 瓷砖
复刻真实自然之美

Address: D06, East Area, China Ceramics Industry Headquarters (CCH),
NO.68, West Jihua Road, Chancheng District, Foshan, Guangdong, China
广东省佛山市禅城区中国陶瓷产业总部基地东区 D 座 06 栋
www.newbeetile.com



Newbee
纽密 | 瓷砖
复刻真实自然之美



Clouds sweep across the valley, and the sky nourishes the stars. The connection and induction between humans and the universe of plants and trees transcend time and space, and will last forever. Beauty and the heavens and earth stand out, we can only try our best to be present.

云影掠过山谷，苍天滋养群星。人类与草木宇宙的联系与感应超越时空万古长存万古生生不息。美和天地兀自展现，我们只能尽量在场。

Why NEWBEE

Founded in 1997, our company has always been guided by the product philosophy of "interpreting international trends and savoring modern textures." We are committed to continuous innovation, crafting high-quality tiles that deliver exceptional home experiences for our customers. Upholding the brand spirit of "quality first, endless innovation, global vision, environmental responsibility, and customer-centricity," we have deeply rooted ourselves in the tile industry, continuously showcasing our brand value. Over the years, the company has earned the trust and acclaim of global customers through superior product quality, cutting-edge design concepts, and attentive service. Moving forward, we will continue to drive innovation, embrace environmental responsibility, and bring more high-quality, stylish, and eco-friendly tile products to consumers worldwide, contributing to the realization of beautiful home living.

纽密公司成立于1997年，始终以“演绎国际潮流、品味现代质感”的产品理念为指引，致力于不断创新，打造高品质瓷砖，为客户提供卓越的家居体验。我们秉承“品质优先、创新无止境、全球化视野、环保责任、客户至上”的品牌精神，深耕瓷砖行业，持续演绎品牌价值。多年来，公司凭借卓越的产品质量、前沿的设计理念和贴心的服务，赢得了全球客户的信赖与赞誉。未来，我们将继续以创新为驱动，以环保为己任，为全球消费者带来更多高品质、时尚环保的瓷砖产品，助力美好家居生活的实现。




VIDORA

薇多拉

4
COLORS

24
FACES



10mm

Size: 200x1200mm/ 8"x48" Nature matt



Water absorption:
0.05%



Rectified edge



Digital-Tech



WOODEN SERIES



NB212906

Size: 200x1200mm/ 8"x48"
24Faces

NB212906

Size: 200x1200mm/ 8"x48"
24Faces

NB212907

Size: 200x1200mm/ 8"x48"
24Faces

NB212908

Size: 200x1200mm/ 8"x48"
24Faces

NB212909


Size: 200x1200mm/ 8"x48"
24Faces

WOODEN SERIES



NB212906

Size: 200x1200mm/ 8"x48"
24Faces

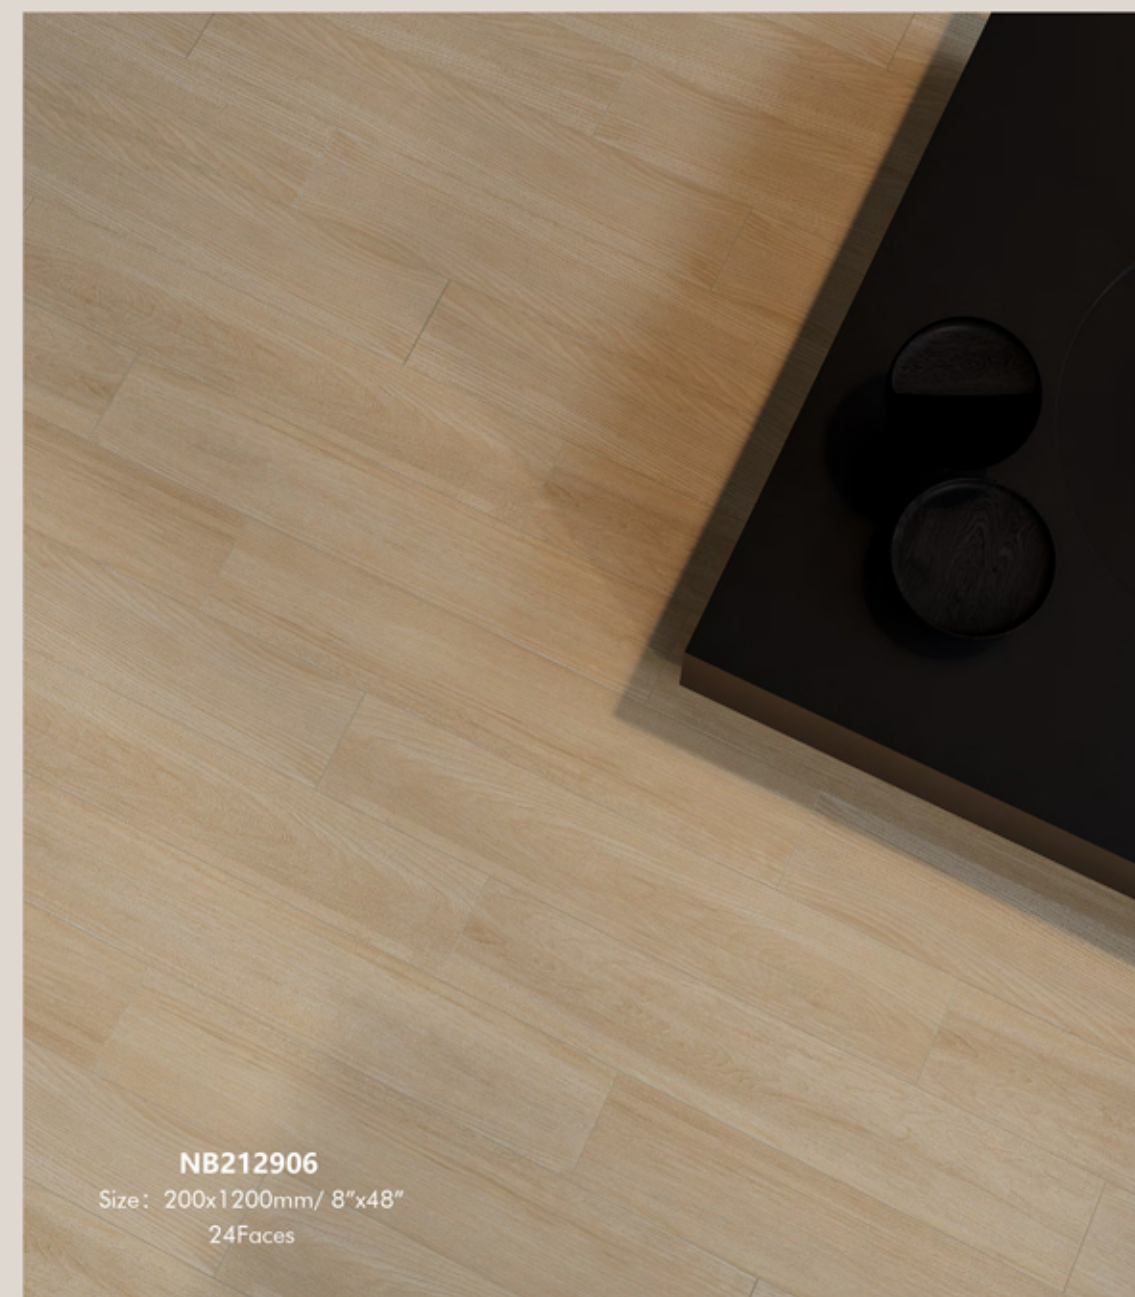

NB212906

Size: 200x1200mm/ 8"x48"
24Faces

Whom shall I beckon to hear the wild winds toll the moon?
My heart, a wilderness, where bitter winds never cease.

WOODEN SERIES



Roam wild through the mountain woods—inhale the crisp, piercing fragrance of trees, listen to the flock's whispered secrets.



NB212907

Size: 200x1200mm/ 8"x48"
24Faces




NB212907
Size: 200x1200mm/ 8"x48"
24Faces

WOODEN SERIES



NB212908

Size: 200x1200mm/ 8"x48"
24Faces

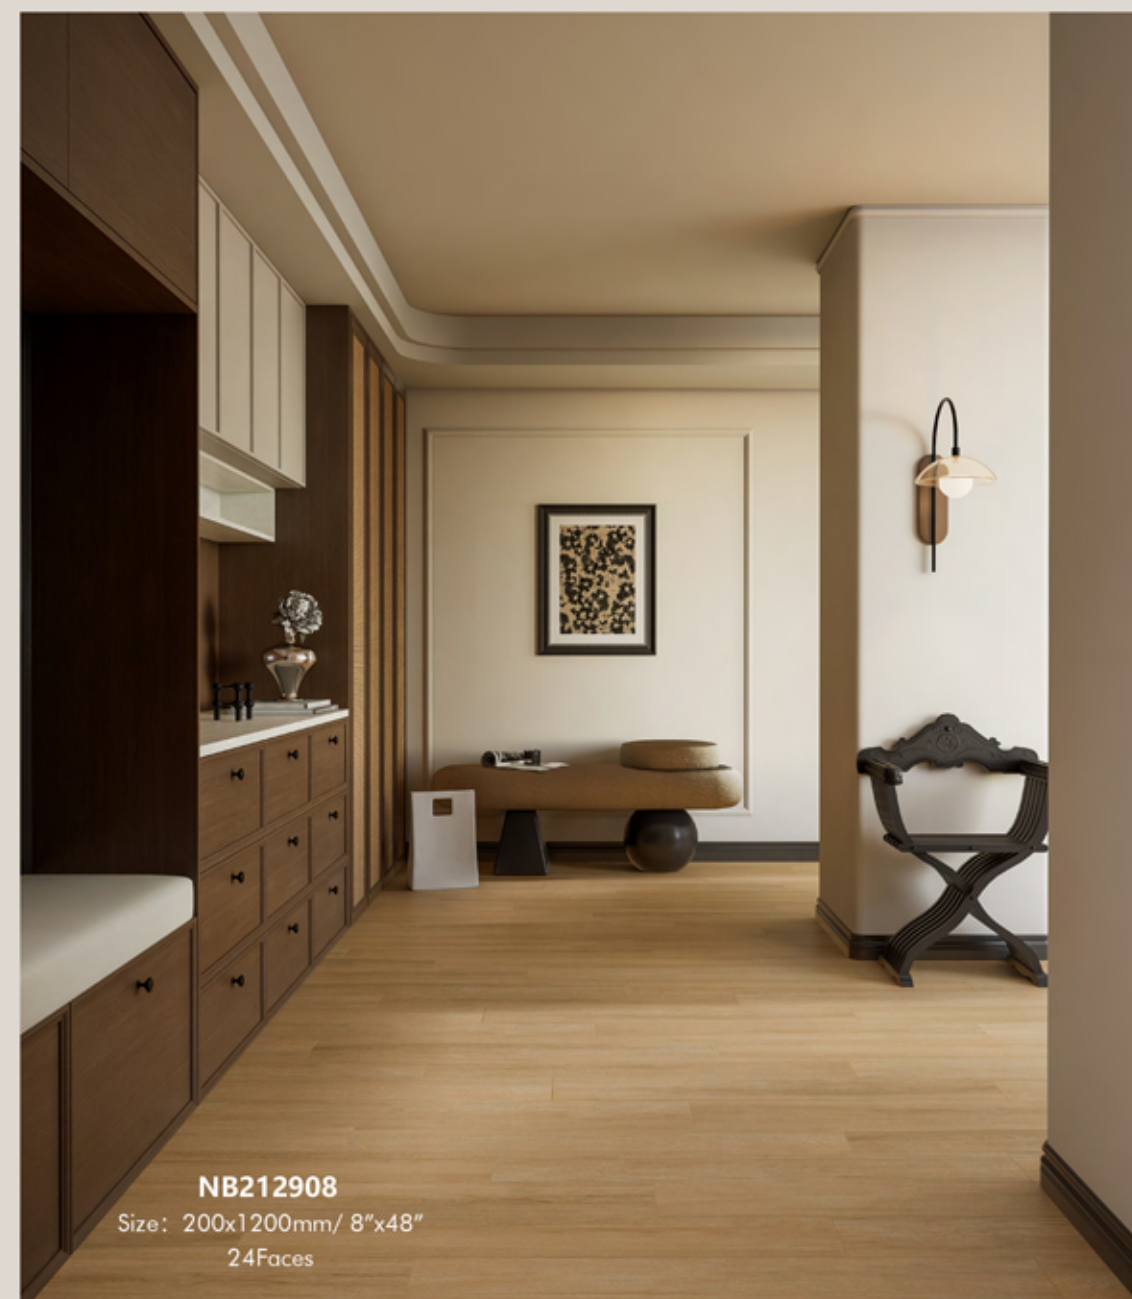

NB212908

Size: 200x1200mm/ 8"x48"
24Faces

The true meaning of life lies in the freedom to enjoy
sunlight, forests, mountains, meadows, rivers, and in finding
contentment in ordinary simplicity.

WOODEN SERIES



The world, still its ancient self—
branches etched with the same twilight script.
Yet in a breath, the world tilts toward dusk,
mountains and rivers steeped in autumn's hush.



NB212909

Size: 200x1200mm/ 8"x48"
24Faces



NB212906

24

FACES

Size: 200x1200mm/ 8"x48" Nature matt



NB212907

24

FACES

Size: 200x1200mm/ 8"x48" Nature matt



NB212908

24

FACES

Size: 200x1200mm/ 8"x48" Nature matt



NB212909

24

FACES

Size: 200x1200mm/ 8"x48" Nature matt



TECHNICAL CHARACTERISTICS-技术特征	TEST STANDARD 执行标准	STANDARD VALUE 标准规定值	NEWBEE AVERAGE VALUE NEWBEE 平均值
尺寸和表面质量 Dimensions and surface quality			
长度 LENGTH	EN ISO 10545-2:2018	±0.6%	-0.04% ~ -0.02%
		±2.0mm	-0.5mm ~ -0.3mm
宽度 WIDTH	EN ISO 10545-2:2018	±0.6%	+0.11% ~ +0.20%
		±2.0mm	+0.2mm ~ +0.4mm
厚度 THICKNESS	EN ISO 10545-2:2018	±5%	0 ~ +0.7%
		±0.5mm	0 ~ +0.1mm
物理性能 Physical properties			
吸水率 WATER ABSORPTION	EN ISO 10545-3:2018	Eb≤0.5%	-0.04% ~ -0.02%
		单个值不大于0.6% Individual maximum 0.6%	-0.5mm ~ -0.3mm
破坏强度/N Breaking strength,in N	EN ISO 10545-4:2019	≥1300	3200
断裂模数/(MPa) Modulus of rupture,in MPa	EN ISO 10545-4:2019	平均值≥35 Minimum 35	42
		单个值≥32 Individual minimum 32	39.3-48.1
耐磨性 Abrasion resistance	EN ISO 10545-7:1988/AC:1999	4级	Class4
抗热震性 Thermal shock resistance	EN ISO 10545-9:2013	应通过此项测试 Pass	样品经试验, 无炸裂 或裂纹 Fully resistance
抗釉裂性: 有釉砖 Crazing resistance:glazed tiles	EN ISO 10545-11:1996	应通过此项测试 Pass	样品经试验, 无炸裂 或裂纹 Fully resistance
抗冻性 Frost resistance	EN ISO 10545-12:1997	应通过此项测试 Pass	样品经试验, 无炸裂 或裂纹 Fully resistance
防滑性能 Slipperiness	AS4586-2013 湿法Slider96	报告检验结果 Declared valuc	P3
化学性能 Chemical prperties			
耐污染性 Resistance to staining	EN ISO 10545-14:2015	不低于3级 Minimum Class 3	5级 Class 5
耐化学腐蚀性 Resistance to chemicals			
耐家庭化学试剂和游泳池盐类 Resistance to household chemicals and swimming pool salts	EN ISO 10545-13:2016	不低于 B 级 Minimum class B	A
耐低浓度酸和碱 Resistance to low concentrations of acids and alkalis	EN ISO 10545-13:2016	报告检验结果 Declared value	LA
耐高浓度酸和碱 Resistance to high concentrations of acids and alkalis	EN ISO 10545-13:2016	报告检验结果 Declared value	HA